FULLVIEW RETRACTABLE INSECT SCREEN

ANDERSEN **10** Series Storm Door

DESIGN OPTIONS *Stocked locally for faster lead times

White*

Charcoal Grey

Sandtone

Bronze

Black*

Almond

Terratone

Cinnamon Toast

Modern Hardware

Matte Black*
Brushed Dark Nickel
Brushed French Gold
Metallic Stone
Venetian Bronze

Traditional Hardware

Nickel*
Antique Brass
Brass
Matte Black
Oil Rubbed Bronze

PRICING

Please contact your salesman today to discuss pricing!

FEATURES

Thick aluminum frame (1 1/2" thick) with reinforced corners and decorative profile

Premium double-layer weatherstrip for added energy efficiency

Built-in keyed deadbolt for added security

Hands free hold-open feature conveniently keeps the door open

Vents from top with balanced retractable insect screen

Retractable insect screen conveniently rolls into the frame of the door when not in use

Easy, one-hand operation and unlimited glass positioning

SMOOTH CONTROL PLUS SYSTEM

More consistant latch and a smooth closing motion

Performs better in wind durability tests

Simple close speed adjustment

D&M INDUSTRIES ESOP

MEASURING GUIDE

1 Check to ensure door opening and trim allow enough space for a storm door.

DIMENSION A:
Minimum 3/4” width flat trim surface required

DIMENSION B:
Minimum 1” trim (blackmould) depth required

DIMENSION C:
Minimum of 2 1/2” door frame (jamb) depth required*

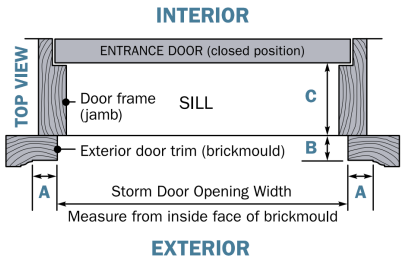

*Depending on the depth and location of your entry door handle set, additional clearance may be needed.

2 Measure door opening in order to determine the size storm door you need.

Measure the width of the door opening at the inside face of exterior trim on each side at top, center and botom and record the shortest measurement.

(See measure points W1, W2, & W3 in the illustration to the right)

Measure for the height from the sill to the underside of the brickmould at the top.

(See measure point H in the illustration to the right)

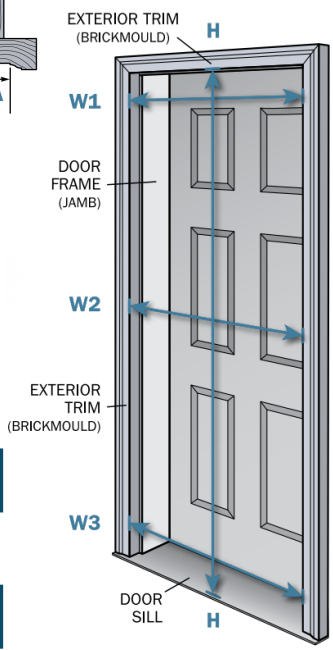

RECORD YOUR SHORTEST WIDTH MEASURMENT:

W:

RECORD YOUR HEIGHT MEASURMENT:

H:

3 Determine the size you need based on the door opening measurements and the storm door model that is selected

STANDARD DOOR SIZE **WIDTH RANGES:**	30”	32”	34”	36”	STANDARD DOOR SIZE **HEIGHT RANGES:** 80”
10FV, 10RS, 8 FV, 8RS	29 7/8” to 30 3/8”	31 7/8” to 32 3/8”	33 7/8” to 34 3/8”	35 7/8” to 36 3/8”	80” to 80 7/8”
6FV, 6RS, and all Panel Ventilating	29 7/8” to 30 3/8”	31 3/4” to 32 3/8”	33 3/4” to 34 3/8”	35 3/4” to 36 7/8”	80” to 81”

3a. Custom Size Availability

FULLVIEW

SERIES	STYLE	CUSTOM	CUSTOM XL
10	Interchangeable	●	●
	Retractable Screen	●	
8	Interchangeable	●	●
	Retractable Screen	●	
6	Interchangeable		
	Retractable Screen	●	

	WIDTH	HEIGHT
Custom Door opening	27 7/8” to 38 3/8”	72” to 84 7/8”
Custom XL Door opening	27 7/8” to 42”	72” to 96”

PANEL VENTILATING

SERIES	STYLE	CUSTOM	CUSTOM XL
10	3/4 Light	●	
	1/2 Light	●	
8	3/4 Light	●	
	1/2 Light	●	
6	3/4 Light		
	1/2 Light	●	●

	WIDTH	HEIGHT
Custom Door opening	27 3/4” to 38 3/8”	75” to 84 7/8”
Custom XL Door opening	38 1/2” to 42”	79” to 91”

● = Select models available in custom sizes or custom XL sizes

4 Choose the door handing that works best for your entryway.

Left Handed (LH)



Exterior View

Right Handed (RH)

D&M INDUSTRIES ESOP